FL110.10.00

Application: single phase general purpose

Standard Reference: EN 133000 - EN 60950 / UL 1283 (for safety)

Date: 01/04/24

INSERTION LOSS: CISPR 17 / MIL STD 220A

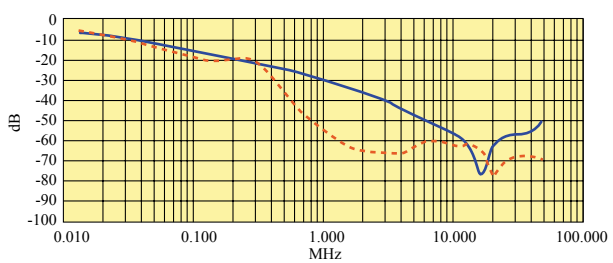

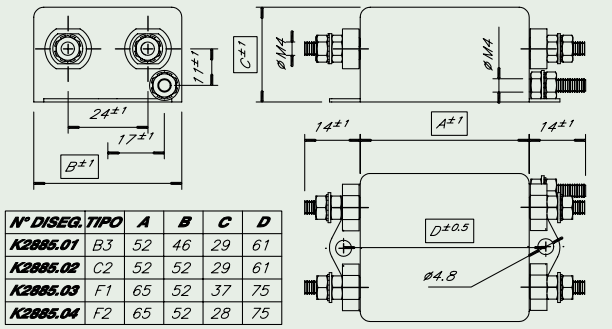

N° DISEG.	TIPO	A	B	C	D
K2885.01	B3	52	46	29	61
K2885.02	C2	52	52	29	61
K2885.03	F1	65	52	37	75
K2885.04	F2	65	52	28	75

versione con TERMINALI FASTON 6.3x0.8

versione con TERMINALI A VITE M4

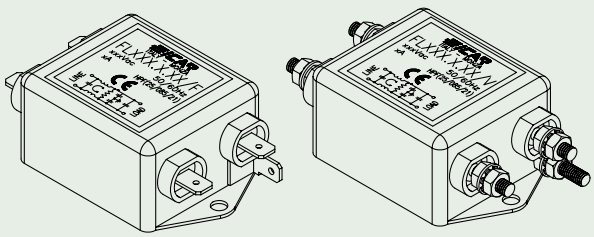

TECHNICAL SPECIFICATION

Number of lines	2
Rated Current (In at 40°C)	10 A
Rated Voltage	250 Vac
Frequency	50÷60 Hz
Over Current	1,4 In x 15' - 5 In x 3"
Leakage Current @ 250 V - 50 Hz	<0,5 mA (worst case)
Test Voltage phase/phase	1800 Vdc
Test Voltage phase/ground	2100 Vac
Climatic Category	-25 +85°C
Relative Humidity	95% RH
Case Material	alpacca
Degree of protection	IP00
Terminal protection for IP20 (metallic cover)	no
Overvoltage & lightnings protection (varistors)	no
Derating Current (I) at temperature over 40°C	$I = In\sqrt{(85 - tamb.)/45}$
Drawing	K2885.02

ICAR spa - Via Isonzo, 10 - 20052 MONZA (Milano, Italy) - Tel. +39 039 83 951 - Fax +39 039 83 32 27 - www.icar.com - Email: sales@icar.com